



REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	10271	MATERIAL IS: 304L STAINLESS STEEL WAS: TITANIUM ALLOY	RLA 8/16/13	MH	AS

MODEL 3145A
STUD MOUNT

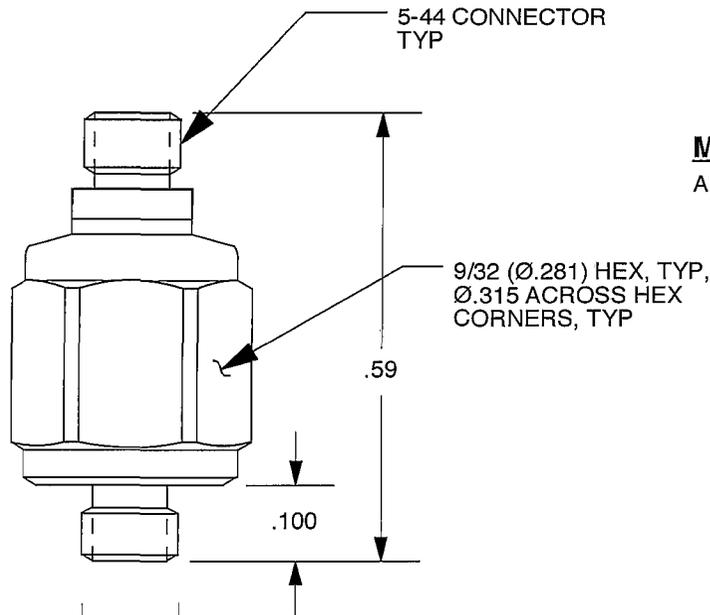


THD 5-40, UNC-2A

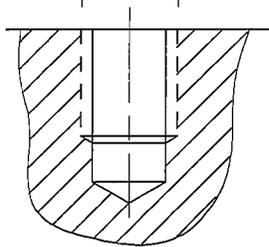

MOUNTING PORT PREPARATION:
 DRILL #38 (Ø.1015) X.200 MIN DEPTH
 TAP 5-40 X .140 MIN DEPTH THD

MODEL 3145AG
ADHESIVE MOUNT

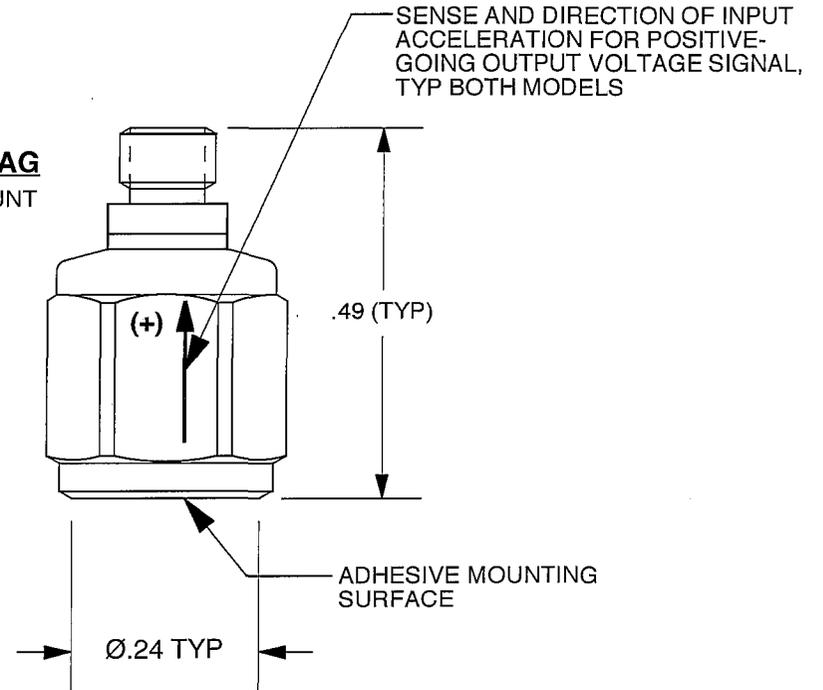

1. MATERIAL: 304L STAINLESS STEEL
2. SEAL-HERMETIC, ALL WELDED.
3. WEIGHT-MOD 3145A-2.3 GRAMS
MOD 3145AG-2.1 GRAMS
4. TO INSTALL MOD 3145A, TORQUE IN PLACE WITH 10 lb-INCHES.
5. SUGGESTED ADHESIVE TYPE FOR MODEL 3145AG-CYANOACRYLATE "INSTANT BOND".

EXCEPT AS OTHERWISE NOTED	
ALL DIMENSIONS IN INCHES TOLERANCE: .xxx = ± .xx = ± .01	
SURFACE FINISH EXCEPT AS NOTED ✓	
BREAK EDGES TO DEBURR RADIUS OR CHAMFER	
△ THESE DIAS ⊙ TO T.I.R.	
FILLETS -	MAX RAD.

		MASTER ONLY IF IN RED		CHATSWORTH, CA.	
SCALE	4X	REV	-	DATE	SEE REV BLK
DATE	3/28/00	PART NO.			
DRAWN	N.C.	CHECKED	R.A.	MAT'L	
APPROVED	N.C.	2/10/03	NEXT ASSEMBLY	USED ON	
TITLE				DWG NO.	
OUTLINE/INSTALLATION DRAWING MODELS 3145A & 3145AG				127-3145A	
				SHEET OF 1	

SPECIFICATIONS
MODEL 3145A LIVM ACCELEROMETER

SPECIFICATION	VALUE	UNITS
PHYSICAL		
WEIGHT	2.3	Grams
SIZE, HEX x HEIGHT (Height does not include mtg. stud)	.281 (9/32) x .49	Inches
MOUNTING PROVISION	5-40 integral stud	
CONNECTOR, TOP MOUNTED	5-44	Coaxial
MATERIAL, HOUSING AND CONNECTOR	300 Series	Stainless Steel
ELEMENT STYLE	Ceramic, Shear	
PERFORMANCE		
SENSITIVITY, $\pm 10\%$ [1]	100	mV/G
RANGE F.S. FOR ± 5 VOLTS OUTPUT	± 50	G's
FREQUENCY RANGE, $\pm 10\%$	0.8 to 10k	Hz
RESONANT FREQUENCY	>45	kHz
EQUIVALENT ELECTRICAL NOISE FLOOR	.007	G's RMS
LINEARITY [2]	$\pm 1\%$	% F.S.
TRANSVERSE SENSITIVITY, MAX.	5	%
STRAIN SENSITIVITY	.002	G's/ $\mu\sigma$ @ 250 $\mu\sigma$
ENVIRONMENTAL		
MAXIMUM VIBRATION/SHOCK	600/3000	\pm G's/G's PEAK
TEMPERATURE RANGE	-60 to +185	$^{\circ}$ F
SEAL, HERMETIC	Glass-to-metal and TIG welded	
COEFFICIENT OF THERMAL SENSITIVITY	.04	%/ $^{\circ}$ F
ELECTRICAL		
SUPPLY CURRENT/COMPLIANCE VOLTAGE RANGE [3]	2 to 20/+18 to +30	mA/Volts
OUTPUT IMPEDANCE, TYP.	100	Ohms
BIAS VOLTAGE	+11 to +13	VDC
DISCHARGE TIME CONSTANT	0.5 to 1.2	Sec
OUTPUT SIGNAL POLARITY FOR ACCELERATION TOWARD TOP	Positive	
CASE GROUNDING	Case is grounded to electrical power ground	

[1] Measured at 100 Hz, 1 G RMS per ISA RP 37.2.

[2] Measured using zero-based best straight-line method, % of F.S. or any lesser range.

[3] Do not apply power to this device without current limiting, 20 mA MAX. To do so will destroy the integral IC amplifier.



Presented by: Absolute Gauge Technologies
 sales@absolute-gauge.com; www.absolute-gauge.com,
 Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1 888 754 7008