

Delivery: ex stock | Warranty: 24 months

**burster**


## High-Precision Calibration Source for Voltage, Current, Thermocouples, RTDs, Frequency and Resistance

### DIGISTANT® MODEL 4463 NEW

Preliminary data sheet



Includes



#### Highlights

- DC voltage up to  $\pm 100.0000$  V,  $\pm 0.002$  %
- DC current up to  $\pm 50.0000$  mA,  $\pm 0.005$  %
- Thermocouple simulation of R, S, B, J, T, E, K, N, M, C, D, G2
- Automatic sequence function (ramp function)

#### Options

- RTD Simulation Pt100 ... Pt1000, Ni100 ... Ni1000
- True ohmic resistance simulation 10  $\Omega$  ... 300 k $\Omega$
- Frequency simulation 0.01 Hz ... 15 kHz
- Frequency measurement 0.01 Hz ... 100 kHz

#### Applications

- Testing DC voltage and current measuring devices
- Testing thermocouple and temperature measuring instruments
- Controlling process sequences using the ramp function
- Calibration of controllers, sensors and PLC analog inputs

#### Product description

This high-precision calibration source is able to measure currents up to  $\pm 50$  mA, voltages  $\pm 100$  V and temperature setpoint values of 12 thermocouple types, including R, S, B, J, T, E, K and N. Voltage drops across the measuring leads can be easily compensated via the sense line.

With "thermoelectric voltage simulation" you can enter  $^{\circ}$ C,  $^{\circ}$ F and K, the temperature scales ITS-90 or IPTS-68 and the reference junction type constant/external. Furthermore, when simulating thermocouples a calibrated external reference junction can be used, with the calibration data being taken into account in the device.

The high-resolution display and very user-friendly menu navigation system informs you quickly and in full detail about the selected function, the selected transmission value, the selected interface and the additional parameters.


The device can be operated both via the keypad and via the Ethernet and USB interface.

With the automatic sequence function (ramp function), for each measurement 32 sequences with a maximum of 100 steps can be saved and started manually or via the interface.



## Source main menu

### Description

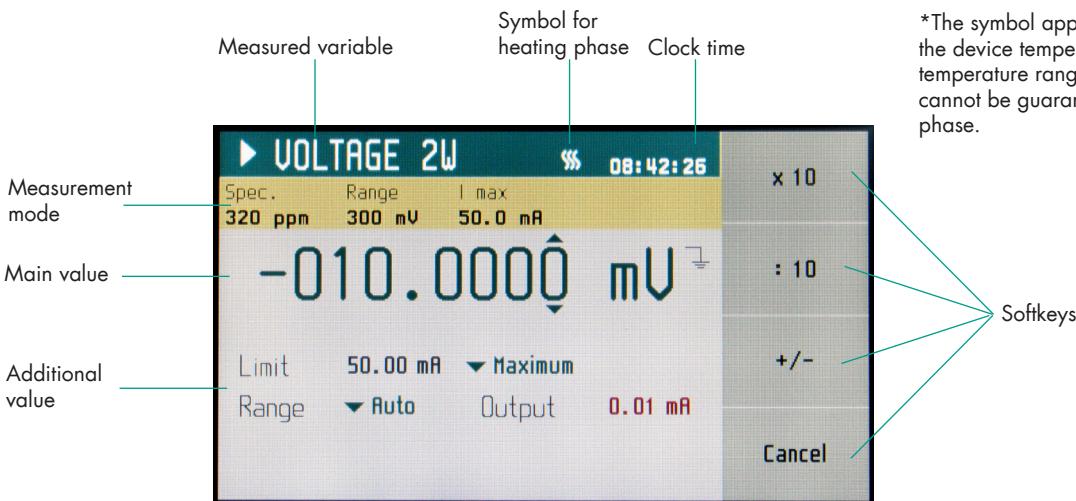

PRESETS			Save
Preset	Function	Date	
00 Startup	Voltage	04.06.2019	Load
01 ---	---	---	Clear
02 ---	---	---	
03 ---	---	---	
04 ---	---	---	
05 ---	---	---	
06 ---	---	---	
07 ---	---	---	Exit

Presets is a memory store that retains all settings that would otherwise be lost on restart.

It contains auxiliary and main parameters for all functions.  
Up to 100 presets can be stored.

Startup (position 00) loads each time the device starts.

CURRENT			Function
Step	▼ STEP1	Settings	
30.0000 mA			
Output current limiting!			
Limit 30.00 V	▼ Maximum	Preset	
Range 50 mA	Output 29.97 V	Menu	

Press the STEP button to start the ramp function.

32 ramps can be stored for each measured variable (time sequences).

Up to 100 steps per sequence can be stored (amplitude/time).



## DAkkS certificate for DIGISTANT® 4463

Initial calibration is included with the purchase of this high-precision calibration source device.

The DIGISTANT® 4463 is a high-quality calibration source that comes with a DAkkS certificate. We recommend recalibrating the DIGISTANT® 4463 every 12 months.

Further details are available at: .... ([link to product website](#))



### Technical Data

Measuring points	44DKD-4463-V0000	44DKD-4463-V0001
Voltage	34	34
Current	28	28
Thermocouples	20	20
RTD (measurement)	5	5
RTD (transmission)	-	8
Resistance	-	26
Frequency (measurement)*	-	6
Frequency (transmission)*	-	5

\* Separate factory certificate to supplement the DAkkS certificate

## External reference junction model 4485-V001 for thermocouples (optional)

- For precision simulation of thermocouples
- Integrated Pt100 for temperature measurement
- Thermically stable and decoupled set-up
- Connection: Miniature female connector



### Technical Data

4485-V001	
Tolerance	±0.3 K
Long-term drift (stability)	Typically 0.05 K/year
Insulation resistance between the poles in the disconnected state	≥20 MΩ
Working temperature range	0 °C ... <b>23 °C</b> ... 40 °C
Storage temperature range	-10 °C ... 60 °C
<b>Note</b>	Thermo cable and connector cause an additional error. We recommend using Class 1.

## DAkkS certificate for external reference junction type 4485-V00X

At 3 points (0 °C, +23 °C and +40 °C). If the reference junction is DAkkS calibrated with the integrated Pt100 sensor and the calculated coefficients are entered in the DIGISTANT® 4463, the additional measurement error for the Pt100 measuring channel can be reduced to ≤0.1 K for a measurement range of +15 °C ... +35 °C.

## Accessories

Order code	
9900-K342	4 measuring leads with particularly low thermoelectric voltage CU/Te safety connectors (with protective sleeve, length 1 m)
9900-K333	RS232 data cable for PC link
4485-V001	External reference junction, 0.3 m cable with LEMO connector
4485-V002	External reference junction, 1 m cable with LEMO connector
9900-K349	USB cable, 1.8 m
9900-K328	BNC connector at both ends, assembled round cable L = 2 m, connector: 2 x BNC, temp. -40 to +90°C,

## Calibration

Test and calibration log	
44DKD-4463-V0000	DKD/DAkkS calibration including adjustment and 2nd calibration for -V0000 version (U,I,TC)
44DKD-4463-V0001	DKD/DAkkS calibration including adjustment and 2nd calibration for -V0001 version (U, I, TC, R, RTD, f*)
44DKD-4485	DKD/DAkkS calibration for Pt100 sensor; calibration points: 0 °C, 23 °C and 40 °C
* Separate factory certificate to supplement the DAkkS certificate	
Calibration	
44ABG	Calibrate a measuring chain or input sensor data, only possible in combination with 44DKD-4485 and 4485-V00X

## Ordering example

Article number	see order code
4463-V0000	Basic version U, I and TC including DAkkS certificate
4463-V0001	Full version with U, I, TC, RTD, R and f including DAkkS certificate