
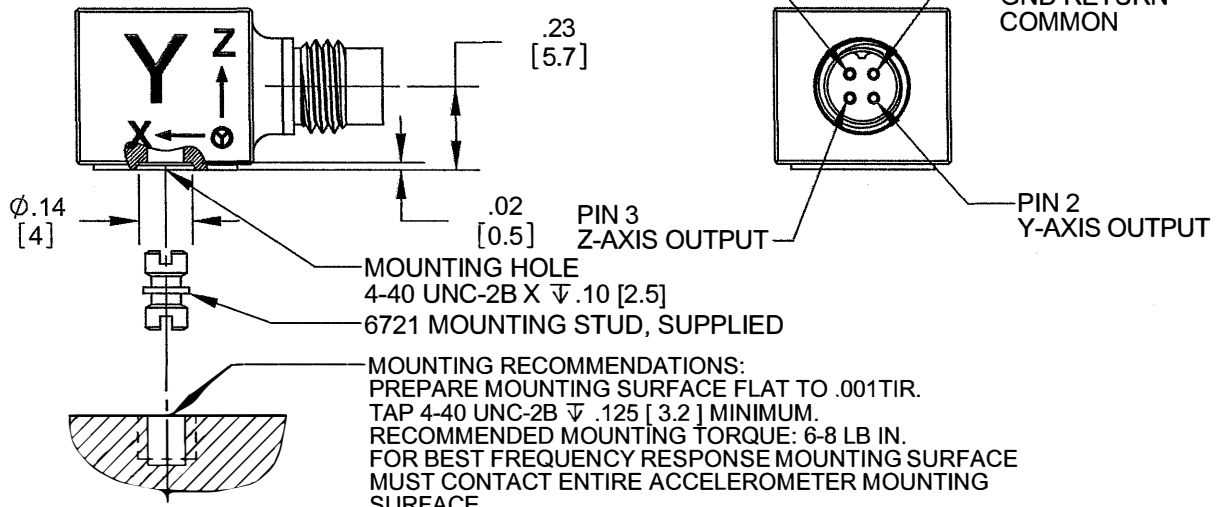
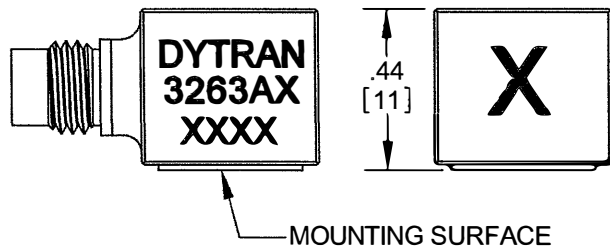


**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED


REVISIONS				
REV.	ECN	DESCRIPTION	BY/DATE	CHK/ APPR
B	8131	ADDED: 3263A2 & A3, NOTE 3 IS: ...MAX WAS:... NOMINAL	JS 12/14/11	<i>[Signature]</i> ANS

MODEL	SENSITIVITY
3263A1	10 mV/g
3263A2	100 mV/g
3263A3	50 mV/g

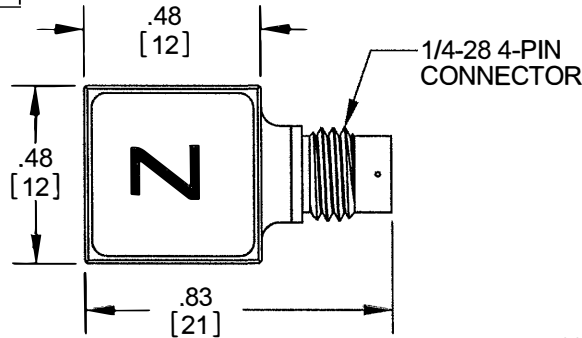

4. MATES WITH DYTRAN MODEL 6811AXX (XX = LENGTH IN FEET)
  3. WEIGHT: 5.6 GRAMS MAX
  2. ARROWS INDICATE ACCELERATION DIRECTION FOR POSITIVE OUTPUT.
  1. HOUSING MATERIAL: TITANIUM ALLOY
- NOTES: UNLESS OTHERWISE SPECIFIED.

**MOUNTING RECOMMENDATIONS:**  
 PREPARE MOUNTING SURFACE FLAT TO .001TIR.  
 TAP 4-40 UNC-2B  $\nabla$  .125 [ 3.2 ] MINIMUM.  
 RECOMMENDED MOUNTING TORQUE: 6-8 LB IN.  
 FOR BEST FREQUENCY RESPONSE MOUNTING SURFACE MUST CONTACT ENTIRE ACCELEROMETER MOUNTING SURFACE.



UNLESS OTHERWISE SPECIFIED:  
 INTERPRET DIM & TOL PER ASME Y14.5M - 1994.  
 REMOVE BURRS.  
 COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA.  
 CHAM EXT THDS 45° TO MINOR DIA.  
 THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS.  
 THDS PER MIL-S-7742.  
 DIMENSIONS APPLY AFTER FINISHING.  
 ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005.  
 BREAK SHARP EDGES .005 TO .010.  
 MACHINED FILLET RADII .005 TO .015.  
 WELDING SYMBOLS PER AWS A2.4.  
 ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS  
 TOLERANCES ARE:  
 INCHES    METRIC    ANGLES  
 .XX ± .03    .X ± 0.8    ± 1°  
 .XXX ± .010    .XX ± 0.25

MATERIAL

FINISH

DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS		DATE
ORIG	RA	9/9/06
CHK	JS	09/09/11
APP	DV	09/27/11
APP		



**MASTER ONLY IF IN RED**

Chatsworth, CA

TITLE:  
**OUTLINE/INSTALLATION DRAWING,  
 MODEL 3263A SERIES  
 ACCELEROMETER**

SIZE	CAGE CODE	DWG. NO.	REV
<b>A</b>	<b>2W033</b>	<b>127-3263A3</b>	<b>B</b>

SCALE: NONE      SOLIDWORKS      SHEET 1 OF 1

MODEL NUMBER 3263A3	PERFORMANCE SPECIFICATION				DOC NO. PS3263A3																																									
	TRIAxIAL ACCELEROMETER, IEPE				REV E, ECN 10841, 03/07/14																																									
<p>ACTUAL SIZE</p>	<ul style="list-style-type: none"> <li>• TRIAXIAL ACCELEROMETER</li> <li>• HIGH SENSITIVITY</li> <li>• MINATURE SIZE</li> </ul>		<p><b>This family also includes:</b></p> <table border="1"> <thead> <tr> <th>Model</th> <th>Sensitivity (mV/g)</th> <th>Range (Gpeak)</th> <th>Resolution (Grms)</th> <th>Oper. Temp(*F)</th> <th>TC</th> </tr> </thead> <tbody> <tr> <td>3263A1</td> <td>10</td> <td>500</td> <td>0.0008</td> <td>-60 to +250</td> <td>1.0 to 2.0</td> </tr> <tr> <td>3263A2</td> <td>100</td> <td>50</td> <td>0.0006</td> <td>-60 to +180</td> <td>1.0 to 2.0</td> </tr> </tbody> </table>			Model	Sensitivity (mV/g)	Range (Gpeak)	Resolution (Grms)	Oper. Temp(*F)	TC	3263A1	10	500	0.0008	-60 to +250	1.0 to 2.0	3263A2	100	50	0.0006	-60 to +180	1.0 to 2.0																							
	Model	Sensitivity (mV/g)	Range (Gpeak)	Resolution (Grms)	Oper. Temp(*F)	TC																																								
3263A1	10	500	0.0008	-60 to +250	1.0 to 2.0																																									
3263A2	100	50	0.0006	-60 to +180	1.0 to 2.0																																									
<p>Please, refer to the performance specifications of the products in this family for detailed description.</p> <p><b>SUPPLIED ACCESSORIES</b></p> <p>a) Model 6721 mounted stud 4-40 to 4-40.</p> <p><b>Notes:</b></p> <p>[1] Connector mates with Dytran cable assembly Model 6811AXX (XX= length in feet)</p> <p>[2] Measured at 100 Hz, 1 grms per ISA RP 37.2.</p> <p>[3] Measured using zero-based best straight-line method, % of F.S. or any lesser range.</p> <p>[4] Do not apply power to this device without current limiting, 20 mA MAX. To do so will destroy the integral IC amplifier.</p> <p>[5] In the interest of constant product improvement, we reserve the right to change specifications without notice.</p>																																														
<p><b>PHYSICAL</b></p>		<table border="1"> <thead> <tr> <th>ENGLISH</th> <th>SI</th> </tr> </thead> <tbody> <tr> <td>Weight, Max.</td> <td>0.2 oz</td> <td>5.6 grams</td> </tr> <tr> <td>Mounting, Integral Thread</td> <td>4-40 UNC-2B</td> <td>4-40 UNC-2B</td> </tr> <tr> <td>Connector [1]</td> <td>4 PIN</td> <td>4 PIN</td> </tr> <tr> <td>Material Body</td> <td>Titanium</td> <td>Titanium</td> </tr> <tr> <td>Sensing Element</td> <td>Ceramic</td> <td>Ceramic</td> </tr> <tr> <td>Mode</td> <td>Shear</td> <td>Shear</td> </tr> </tbody> </table>	ENGLISH	SI	Weight, Max.	0.2 oz	5.6 grams	Mounting, Integral Thread	4-40 UNC-2B	4-40 UNC-2B	Connector [1]	4 PIN	4 PIN	Material Body	Titanium	Titanium	Sensing Element	Ceramic	Ceramic	Mode	Shear	Shear																								
ENGLISH	SI																																													
Weight, Max.	0.2 oz	5.6 grams																																												
Mounting, Integral Thread	4-40 UNC-2B	4-40 UNC-2B																																												
Connector [1]	4 PIN	4 PIN																																												
Material Body	Titanium	Titanium																																												
Sensing Element	Ceramic	Ceramic																																												
Mode	Shear	Shear																																												
<p><b>PERFORMANCE</b></p>		<table border="1"> <thead> <tr> <th>ENGLISH</th> <th>SI</th> </tr> </thead> <tbody> <tr> <td>Sensitivity +/- 10% [2]</td> <td>50 mV/g</td> <td>5.10 mV/ m/s<sup>2</sup></td> </tr> <tr> <td>Range F.S. For ± 5 Volts Output</td> <td>100 g</td> <td>± 980 m/s<sup>2</sup></td> </tr> <tr> <td>Frequency Response, - 10% to + 15%</td> <td>0.3 to 10000 Hz</td> <td>0.3 to 10000 Hz</td> </tr> <tr> <td>Resonant Frequency</td> <td>&gt;40 KHz</td> <td>&gt;40 KHz</td> </tr> <tr> <td>Phase Response, ± 5°</td> <td>2 to 3000 Hz</td> <td>2 to 3000 Hz</td> </tr> <tr> <td>Linearity, Max [3]</td> <td>± 1% %F.S</td> <td>± 1% %F.S</td> </tr> <tr> <td>Transverse Sensitivity, Max.</td> <td>6%</td> <td>6%</td> </tr> <tr> <td>Equivalent Electrical Noise Floor</td> <td>0.0008 g rms</td> <td>0.008 m/s<sup>2</sup> rms</td> </tr> <tr> <td>Spectral Noise</td> <td>1Hz: 100 μGrms/√(Hz)</td> <td>981 μm/s<sup>2</sup> rms/√(Hz)</td> </tr> <tr> <td></td> <td>10Hz: 50 μGrms/√(Hz)</td> <td>491 μm/s<sup>2</sup> rms/√(Hz)</td> </tr> <tr> <td></td> <td>100Hz: 10 μGrms/√(Hz)</td> <td>98 μm/s<sup>2</sup> rms/√(Hz)</td> </tr> <tr> <td></td> <td>1000Hz: 10 μGrms/√(Hz)</td> <td>98 μm/s<sup>2</sup> rms/√(Hz)</td> </tr> <tr> <td></td> <td>10000Hz: 5 μGrms/√(Hz)</td> <td>49 μm/s<sup>2</sup> rms/√(Hz)</td> </tr> </tbody> </table>	ENGLISH	SI	Sensitivity +/- 10% [2]	50 mV/g	5.10 mV/ m/s <sup>2</sup>	Range F.S. For ± 5 Volts Output	100 g	± 980 m/s <sup>2</sup>	Frequency Response, - 10% to + 15%	0.3 to 10000 Hz	0.3 to 10000 Hz	Resonant Frequency	>40 KHz	>40 KHz	Phase Response, ± 5°	2 to 3000 Hz	2 to 3000 Hz	Linearity, Max [3]	± 1% %F.S	± 1% %F.S	Transverse Sensitivity, Max.	6%	6%	Equivalent Electrical Noise Floor	0.0008 g rms	0.008 m/s <sup>2</sup> rms	Spectral Noise	1Hz: 100 μGrms/√(Hz)	981 μm/s <sup>2</sup> rms/√(Hz)		10Hz: 50 μGrms/√(Hz)	491 μm/s <sup>2</sup> rms/√(Hz)		100Hz: 10 μGrms/√(Hz)	98 μm/s <sup>2</sup> rms/√(Hz)		1000Hz: 10 μGrms/√(Hz)	98 μm/s <sup>2</sup> rms/√(Hz)		10000Hz: 5 μGrms/√(Hz)	49 μm/s <sup>2</sup> rms/√(Hz)			
ENGLISH	SI																																													
Sensitivity +/- 10% [2]	50 mV/g	5.10 mV/ m/s <sup>2</sup>																																												
Range F.S. For ± 5 Volts Output	100 g	± 980 m/s <sup>2</sup>																																												
Frequency Response, - 10% to + 15%	0.3 to 10000 Hz	0.3 to 10000 Hz																																												
Resonant Frequency	>40 KHz	>40 KHz																																												
Phase Response, ± 5°	2 to 3000 Hz	2 to 3000 Hz																																												
Linearity, Max [3]	± 1% %F.S	± 1% %F.S																																												
Transverse Sensitivity, Max.	6%	6%																																												
Equivalent Electrical Noise Floor	0.0008 g rms	0.008 m/s <sup>2</sup> rms																																												
Spectral Noise	1Hz: 100 μGrms/√(Hz)	981 μm/s <sup>2</sup> rms/√(Hz)																																												
	10Hz: 50 μGrms/√(Hz)	491 μm/s <sup>2</sup> rms/√(Hz)																																												
	100Hz: 10 μGrms/√(Hz)	98 μm/s <sup>2</sup> rms/√(Hz)																																												
	1000Hz: 10 μGrms/√(Hz)	98 μm/s <sup>2</sup> rms/√(Hz)																																												
	10000Hz: 5 μGrms/√(Hz)	49 μm/s <sup>2</sup> rms/√(Hz)																																												
<p><b>ENVIRONMENTAL</b></p>		<table border="1"> <tbody> <tr> <td>Maximum Vibration</td> <td>600 ±gpk</td> <td>5886 ± m/s<sup>2</sup> pk</td> </tr> <tr> <td>Maximum Shock</td> <td>5000 ±gpk</td> <td>49050 ± m/s<sup>2</sup> pk</td> </tr> <tr> <td>Temperature Range</td> <td>-60 to +180 °F</td> <td>-51 to 82 °C</td> </tr> <tr> <td>Seal</td> <td>Hermetic</td> <td>Hermetic</td> </tr> </tbody> </table>	Maximum Vibration	600 ±gpk	5886 ± m/s <sup>2</sup> pk	Maximum Shock	5000 ±gpk	49050 ± m/s <sup>2</sup> pk	Temperature Range	-60 to +180 °F	-51 to 82 °C	Seal	Hermetic	Hermetic																																
Maximum Vibration	600 ±gpk	5886 ± m/s <sup>2</sup> pk																																												
Maximum Shock	5000 ±gpk	49050 ± m/s <sup>2</sup> pk																																												
Temperature Range	-60 to +180 °F	-51 to 82 °C																																												
Seal	Hermetic	Hermetic																																												
<p><b>ELECTRICAL</b></p>		<table border="1"> <tbody> <tr> <td>Supply Current [4]</td> <td>2 to 20 mA</td> <td>2 to 20 mA</td> </tr> <tr> <td>Compliance Voltage Range</td> <td>+18 to +30 V</td> <td>+18 to +30 V</td> </tr> <tr> <td>Output Impedance TYP</td> <td>150 Ω</td> <td>150 Ω</td> </tr> <tr> <td>Bias Voltage</td> <td>+11 to +13 VDC</td> <td>+11 to +13 VDC</td> </tr> <tr> <td>Discharge Time Constant</td> <td>1.0 to 2.0 sec</td> <td>1.0 to 2.0 sec</td> </tr> </tbody> </table>	Supply Current [4]	2 to 20 mA	2 to 20 mA	Compliance Voltage Range	+18 to +30 V	+18 to +30 V	Output Impedance TYP	150 Ω	150 Ω	Bias Voltage	+11 to +13 VDC	+11 to +13 VDC	Discharge Time Constant	1.0 to 2.0 sec	1.0 to 2.0 sec																													
Supply Current [4]	2 to 20 mA	2 to 20 mA																																												
Compliance Voltage Range	+18 to +30 V	+18 to +30 V																																												
Output Impedance TYP	150 Ω	150 Ω																																												
Bias Voltage	+11 to +13 VDC	+11 to +13 VDC																																												
Discharge Time Constant	1.0 to 2.0 sec	1.0 to 2.0 sec																																												
<p><b>Figure 1: TYPICAL LOW FREQUENCY RESPONSE</b></p> <p><b>Figure 2: TYPICAL PHASE RESPONSE</b></p> <p><b>Figure 3: TYPICAL SENSITIVITY RESPONSE OVER TEMPERATURE</b></p> <p><b>Figure 4: Mechanical Drawing</b></p>																																														
<p>Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3263A3 for more information.</p>																																														