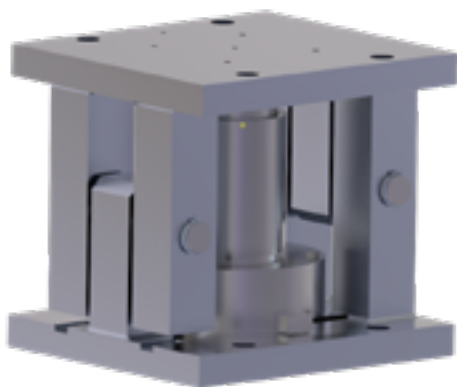


Kits de montage pour RH10X - Montage compression
 Mounting kit for RH10X - Compression mounting

SILOSAFE-RH 750 EVO


500 t, 750 t

 Capteur vendu séparément
 Load cell sold separately

 Option

 EN 1090

- Pour pesage de silos de très forte capacité
- Pour capteur RH10X 500 à 750 t
- Construction en acier zingué
- Dispositif anti-soulèvement
- Butées latérales de forte capacité
- Montage pendulaire pour une pesée précise
- Dispositif de maintien en position haute
- En option, construction et certificat CE EN1090-1, EXC2

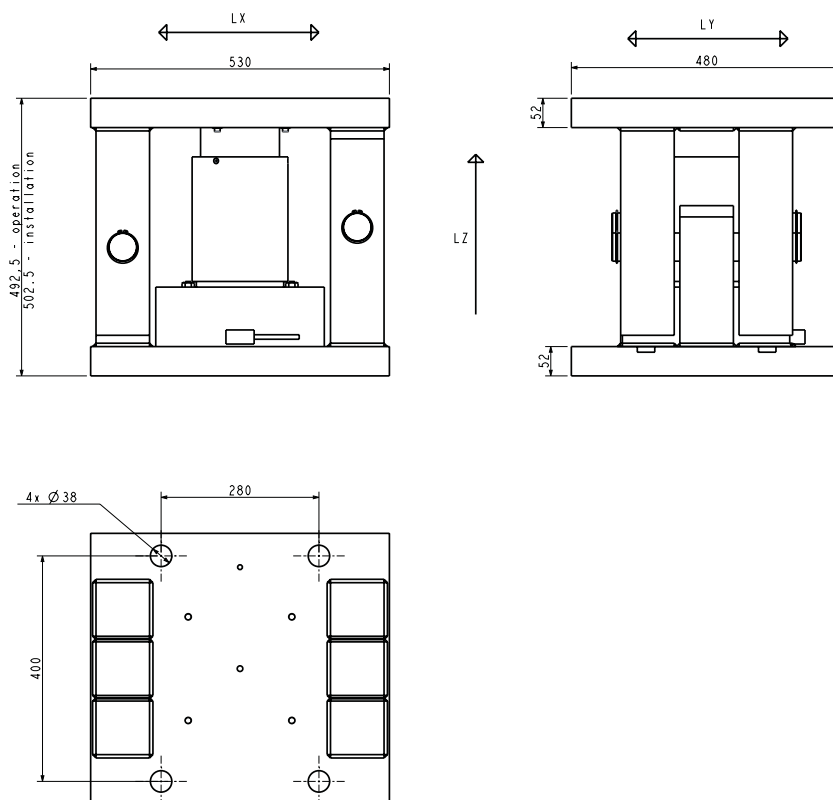- Designed for high capacity silos weighing
- For load cell RH10X 500 to 750 t
- Zinc plated steel construction
- Lift-off prevention device
- High capacity lateral stoppers
- Pendulum mounting for accurate weighing
- Holding device in high position
- An option, construction and EC-certificate EN1090-1, EXC2


 Toutes dimensions en mm. Dimensions et spécifications non contractuelles. Dessins techniques disponibles sur demande.
 All dimensions in mm. Dimensions and specifications do not constitute any liability whatsoever. Technical drawings are available on request.


SILOSAFE-RH 750 EVO


500 t, 750 t

Caractéristiques - Specifications


GÉNÉRALES	GENERAL	
Modèles RH10X	RH10X models	500, 750 t
Force de rappel (% f. appliquée)	Restoring force (% Applied f.)	10 %/mm
Anti-soulèvement max (LZ)*	Max. Lift-off force (LZ)*	500 kN
Force longitudinale max (LX)*	Max longitudinal force(LX)*	300 kN
Force latérale max (LY)*	Max lateral force (LY)*	300 kN
Angle admissible (nom / max)	Admissible angle (Rated / max)	±1° / ±2°

* Les charges indiquées sont des charges limites statiques - Indicated loads are limit static loads

Articulation - Fixed bearing

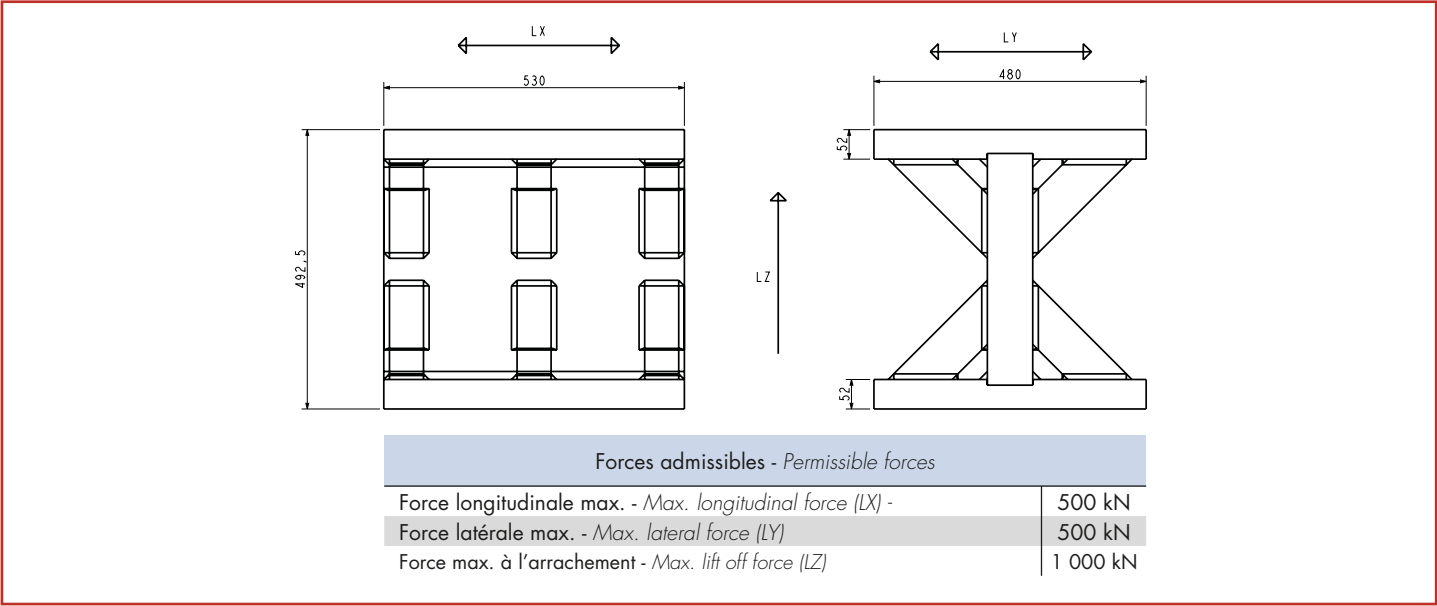

Montage avec articulations - Mounting with fixed bearing

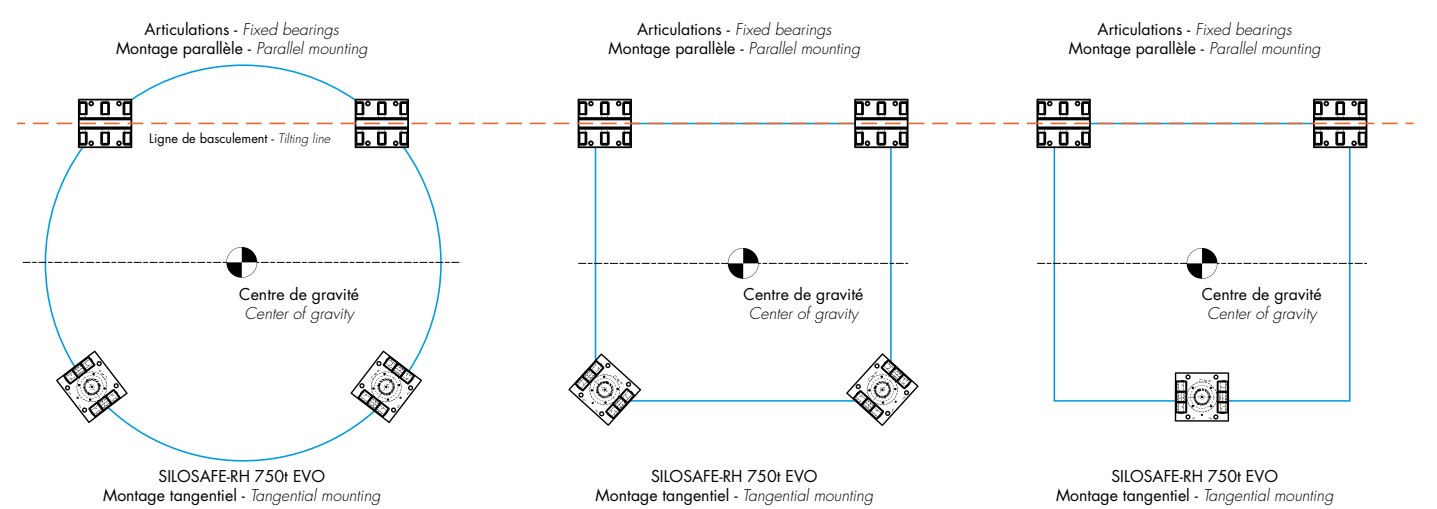

Presented by: Absolute Gauge Technologies
sales@absolute-gauge.com; www.absolute-gauge.com,
Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1 888 754 7008