

# MV-SC2004PM

## 0.4 MP Vision Sensor



## Introduction

With built-in position and measurement algorithm, MV-SC2004PM vision sensor can detect object's presence, position, dimension, etc. It can be monitored and operated via web based interface. The vision sensor can output detection results via RS-232, Ethernet, etc., and cooperate with devices via IO. It supports multiple result output methods and customized result text output.

## Key Feature

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in position and measurement algorithm to detect object's presence, position, dimension, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light cup to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including TCP, UDP, Serial, IO, Modbus, PROFINET, Ethernet/IP, FTP, etc.


## Available Model

- 6 mm focal length vision sensor: MV-SC2004PM-06S-WBN
- 12.4 mm focal length vision sensor: MV-SC2004PM-12S-WBN
- 14.8 mm focal length vision sensor: MV-SC2004PM-15S-WBN

## Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, automobile, etc.

## Dimension

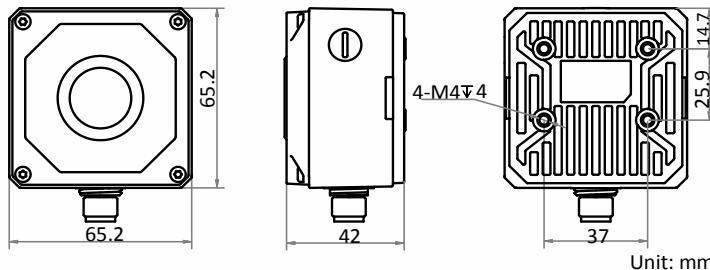

# Specification

Model	MV-SC2004PM-06S-WBN	MV-SC2004PM-12S-WBN	MV-SC2004PM-15S-WBN
<b>Tool</b>			
<b>Vision tool</b>	Feature matching, fixture, find line, find circle, measure brightness, blob, detect distance, measure line to line, measure point and line, N point calibration, coordinate conversion, etc.		
<b>Solution capacity</b>	Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored.		
<b>Communication protocol</b>	RS-232, TCP, UDP, FTP, PROFINET, Modbus TCP, EtherNet/IP		
<b>Camera</b>			
<b>Sensor type</b>	CMOS, global shutter		
<b>Pixel size</b>	6.9 $\mu\text{m}$ $\times$ 6.9 $\mu\text{m}$		
<b>Sensor size</b>	1/2.9"		
<b>Resolution</b>	704 $\times$ 540		
<b>Max. frame rate</b>	100 fps		
<b>Dynamic range</b>	74 dB		
<b>SNR</b>	41 dB		
<b>Gain</b>	0 dB to 15 dB		
<b>Exposure time</b>	16 $\mu\text{s}$ to 1 sec		
<b>Pixel format</b>	Mono 8		
<b>Mono/color</b>	Mono		
<b>Platform</b>			
<b>Memory</b>	2 GB		
<b>Storage</b>	4 GB		
<b>Electrical feature</b>			
<b>Data interface</b>	17-pin M12 connector provides power, Ethernet, digital IO, and serial port		
<b>Ethernet</b>	Fast Ethernet		
<b>Digital I/O</b>	Input signal $\times$ 2 (Line 0/1), output signal $\times$ 3 (Line 5/6/7), bi-directional I/O $\times$ 3 (Line 2/3/4), and button input $\times$ 1. Output signal can be set as NPN or PNP		
<b>Power supply</b>	12 VDC to 24 VDC		
<b>Power consumption</b>	< 5.4 W@12 VDC		
<b>Mechanical</b>			
<b>Lens mount</b>	M12-mount, manual focus supported		
<b>Focal length</b>	6 mm (0.2")	12.4 mm (0.5")	14.8 mm (0.6")
<b>Lens cap</b>	Transparent lens cap. Polarization or infrared filter lens cap is optional		
<b>Light source</b>	LED $\times$ 8: white (by default)/red/blue/NIR, LED $\times$ 48: white/red/blue		
<b>Indicator</b>	Power indicator (PWR), network indicator (LNK), status indicator (STS), and result indicator (OK/NG)		
<b>Dimension</b>	65.2 mm $\times$ 65.2 mm $\times$ 42 mm (2.6" $\times$ 2.6" $\times$ 1.7")		
<b>Weight</b>	Approx. 240 g (0.5 lb.)		
<b>Ingress protection</b>	IP67 (under proper installation of lens and wiring)		
<b>Temperature</b>	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
<b>Humidity</b>	20% to 95% RH, non-condensing		
<b>General</b>			
<b>Client software</b>	Via web based interface, SmartView		
<b>Certification</b>	CE, FCC, KC		

## Detection Range

Lens focal length	Installation distance	Field of view	Single pixel accuracy
6 mm (0.2")	20 mm (0.8")	16.56 mm × 12.42 mm (0.7" × 0.5")	0.023 mm
	300 mm (11.8")	248.4 mm × 186.3 mm (9.8" × 7.3")	0.345 mm
12.4 mm (0.5")	80 mm (3.1")	33.12 mm × 24.84 mm (1.3" × 1.0")	0.046 mm
	600 mm (23.6")	248 mm × 186.3 mm (9.8" × 7.3")	0.345 mm
14.8 mm (0.6")	100 mm (3.9")	33.12 mm × 24.84 mm (1.3" × 1.0")	0.046 mm
	800 mm (31.5")	264.96 mm × 198.72 mm (10.4" × 7.8")	0.368 mm

