

LOAD CELLS



Model	F60X	SK30X	ZFA	ZA30X	R10X	RH10X	CB50X	CA40X
Type	Bending beam		Tension		Compression			
Rated load capacity (Cn)	5 kg ... 500 kg	300 kg ... 5 t	25 kg ... 5 t	0.5 t ... 7.5 t	250 kg ... 100 t	100 t ... 1 000 t	5 t ... 60 t	100 t ... 200 t
Accuracy class	C3 / C6	C3 / C6	-	C3	-	-	C4	-
Combined error (% Cn)	0.017 / 0.008	0.017 / 0.008	0.03	0.017	0.1	0.2	0.013	0.024
Construction	Stainless steel	Stainless steel	Nickel plated steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Protection	Sealed, IP68	Sealed, IP68	Coated, IP67	Sealed, IP68	Sealed, IP68	Sealed, IP68	Sealed, IP68	Sealed, IP68
Certifications	OIML, ATEX, IECEx	OIML, NTEP, ATEX, IECEx	-	OIML, ATEX, IECEx	ATEX, IECEx	ATEX, IECEx	OIML, ATEX, IECEx	ATEX, IECEx

ELECTRONICS



Model	CPJ	eNod3	eNod4-DIN	eNod4-BOX	IPE50 D/P	IPC20	IPC50
Type	Weighing transmitters				Weighing indicators		
Accuracy class	0.05 %	OIML 6 000 d	OIML 6 000 d	OIML 6 000 d	OIML 10 000 d	OIML 10 000 d	OIML 10 000 d
Internal resolution	-	24 bits	24 bits	24 bits	24 bits	24 bits	24 bits
Formated resolution	-	±500 000 pts	±500 000 pts	±500 000 pts	200 000 pts	200 000 pts	200 000 pts
Max. measuring speed	-	6.25 ... 1 600 meas./s.	6.25 ... 1 600 meas./s.	6.25 ... 1 600 meas./s.	200 meas./s.	200 meas./s.	100 meas./s.
Logic Input (I) / Output (O)	○ 2 ○	● / ● 2 1 / 4 ○	○ / ● 4 1 / 4 ○	○ / ● 4 1 / 4 ○	● / ○ 2 1 - 2 ○ / 6 ○	- / -	○ 2 1 / 2 ○
Analog output	●	-	○	○	○	-	○
Communication	-	RS232, RS485 CANbus	USB, RS485 CANbus Ethernet	USB, RS485 CANbus Ethernet	RS232, RS485	RS232, RS485	RS232, RS485
Construction	ABS Box	Aluminum box	DIN Rail Box	Stainless steel box	ABS Box, Panel	ABS Box	ABS Box
Protocols	-	Modbus CANopen®	Modbus Profibus-DP CANopen® Ethernet/IP Profinet EtherCAT	Modbus Profibus-DP CANopen® Ethernet/IP Profinet EtherCAT	Modbus Profibus ASCII	ASCII	ASCII
Protections	-	IP67	-	IP65	IP65 front panel	IP54 / IP68	IP65 front panel
Display	-	-	○ 4"3 - 5"7	○ 4»3 - 5»7	LED 9 / 18 mm	LCD 25 mm	LCD 25 mm

FAT-TANK-WEIGHING-E-0518 - SCAIME - SIREN 389 325 283 - R.C.S. THONON LES BAINS - SIRET 389 325 283 00015 - Non-contratual pictures - SCAIME reserves the right to bring any modification without prior notice - All rights reserved.



Tank and silo weighing

Vessel Weighing, Level Control



Absolute
Gauge
Technologies™

Presented by: Absolute Gauge Technologies

sales@absolutegauge.com; www.absolutegauge.com,
Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1 888 754 7000

Your process under control...



Reliability and safety are the most important factors to be taken into account when it comes to installing tank or silo weighing system. Scaime has designed solutions to meet these requirements in all circumstances.

WEIGHING SOLUTION

Load cells:

To fulfil each of your needs, our load cells cover a wide range of measuring capacities and are offered with different levels of protection and accuracy classes.

Hopper and blender weighing:

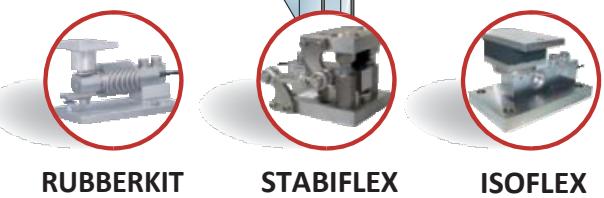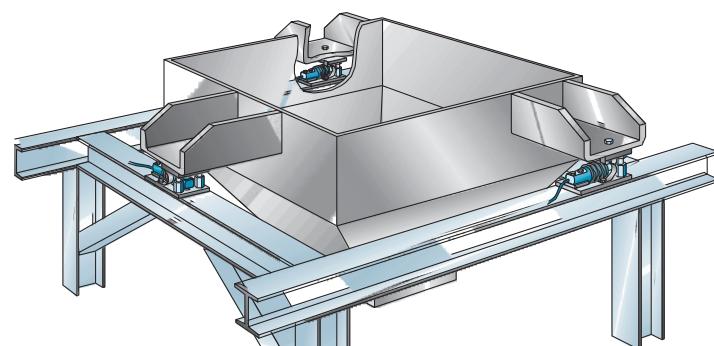


RUBBERKIT

STABIFLEX

ISOFLEX

Tank and silo weighing:

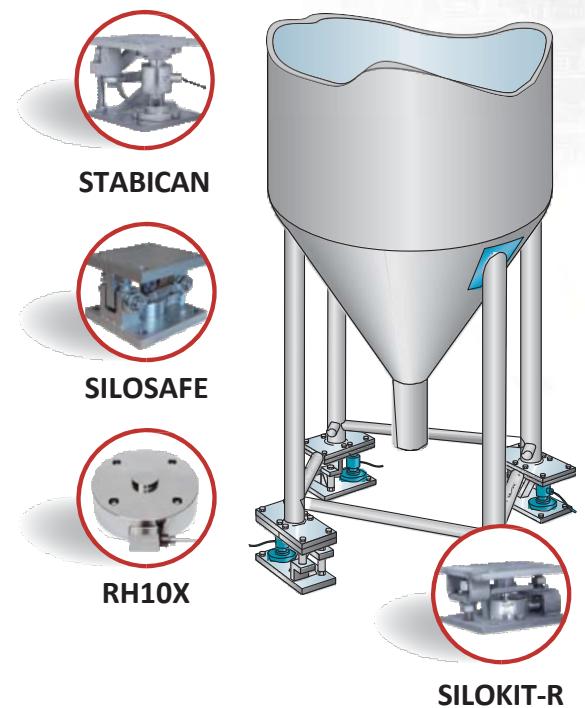

STABICAN


SILOSAFE

RH10X

SILOKIT-R

Horizontal tank weighing...

For level measurement of a lesser accuracy in tanks filled with liquids, it is possible to replace 2 of the 4 load cells with fixed bearings.

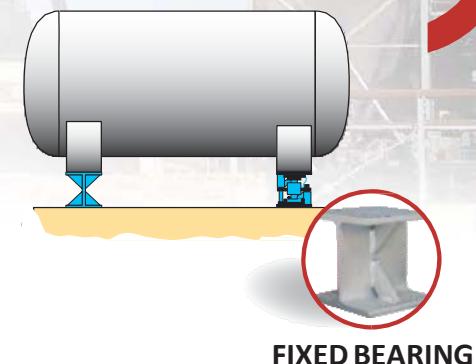


FIXED BEARING

Mounting kits:

In order to restrict the influence of the environment on the performance of your measuring chain, we offer a wide range of accessories and mounting kits, suited to each application.

Hanging hopper weighing:

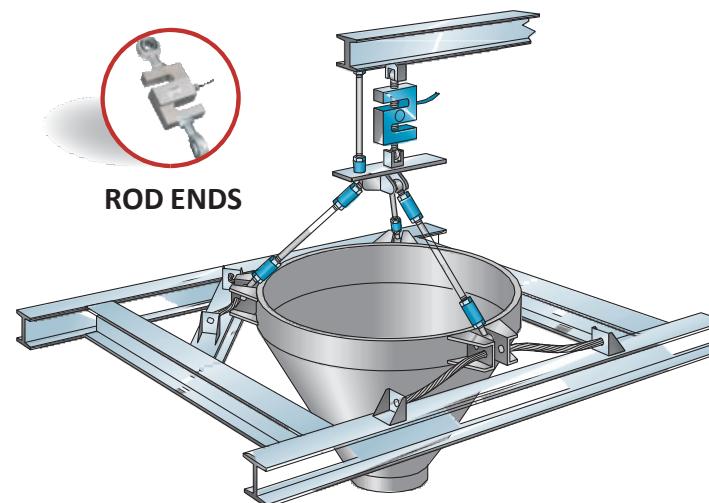

ROD ENDS

Mounting kits	for	5 kg	50 kg	500 kg	5 t	50 t	500 t	
	RUBBERKIT	F60X			200 kg			Compression mounting kit Elastomer compensating for misalignments
	ISOFLEX	SK30X SK30A		300 kg	5 t			Compression mounting kit Vibration damping elastomer
	STABIFLEX	F60X SK30X SK30A			5 t			Compression mounting kit Built-in side stoppers and lift-off prevention High precision ball and cup de-coupling
	SILOKIT-R	R10X			1 t	30 t		Compression mounting kit Built-in lift-off prevention and jack screw Side stabilization prevention
	SILOSAFE	R10X RH10X		1 t	100 t	100 t	750 t	Compression mounting kit Built-in lift-off prevention device and Rod end ball Side stabilization of very high capacity
	STABICAN	CB50X CA40X			5 t	200 t		Compression mounting kit Rod end ball side stabilization Built-in lift-off prevention device
	CUPS	RH10X			100 t	1 000 t		High capacity load cell Compression mounting cups
	ROD ENDS	ZF ZA30X	25 kg		7.5 t			Rod end ball joint kit Hanging hopper weighing

Measuring chain:

Scaime offers all of the elements allowing a weighing system, adapted to your needs, to be built.

For a better integration into industrial environments, we offer:

- solutions for weighing in potentially explosive atmospheres.
- standardized interfaces to the main automation systems (CANopen®, Modbus-RTU, Modbus-TCP, Profibus-DP, EtherNet/IP, Profinet and EtherCAT...)



ATEX / IECEx Certificates: ATEX IECEx

You will benefit from SCAIME expertise in the field of measurement in potentially explosive atmosphere, a flexible solutions for any Atex or IECEx complying weighing installation.

