

## MEAS KPSI 700



- Submersible Level Transducer
- ±1.00% FSO Static Accuracy
- Custom Built in Two Days
- Two Year Warranty



### DESCRIPTION

The MEAS KPSI 700 is a submersible hydrostatic level transducer specifically designed to meet the rigorous environments encountered in liquid level measurement and control. It can be configured to perform to specifications under most adverse, reactive conditions.

All MEAS KPSI Transducers utilize a highly accurate pressure sensor assembly specifically designed for hostile fluids and gases. The assembly is integrated with supporting electronics in a durable waterproof housing constructed of 316 stainless steel or titanium. The attached electrical cable is custom manufactured and includes Kevlar® members to prevent errors due to cable elongation, and a unique water block feature that self-seals in the event of accidental cuts to the cable. Each transducer is shipped with a SuperDry™ Vent Filter that prevents moisture from entering the vent tube for at least one year without maintenance, even in the most humid environments.

### FEATURES

- Custom Polyurethane or ETFE Cable Lengths
- Welded 316SS or Titanium
- Custom Level Ranges up to 700 ft (210m) H<sub>2</sub>O
- Multiple Analog Outputs
- Multiple Nose Piece Styles
- Optional Lifetime Lightning Protection
- Shipped with Long Life Vent Filter

### APPLICATIONS

- Lift Stations
- Pump Control
- Level Control
- Surface Water Monitoring
- Landfill Leachate
- Well Monitoring
- Groundwater Monitoring

### SPECIFICATIONS

| Parameter  | Comment  |                         |
|--|--|-------------------------|
| <b>LEVEL RANGES</b>  |  |                         |
| Full Scale Level Ranges<br>(intermediate level ranges are available) | 2.3 thru 700 ft H <sub>2</sub> O<br>(0.70 thru 210 m H <sub>2</sub> O) | Vented Gage Reference   |
|  | 10 thru 700 ft H <sub>2</sub> O<br>(3 thru 210 m H <sub>2</sub> O)     | Sealed Gage Reference   |
|  | 35 thru 700 ft H <sub>2</sub> O<br>(10 thru 210 m H <sub>2</sub> O)    | Absolute Gage Reference |
| Proof Pressure   | 1.5 x FS   |                         |
| Burst Pressure   | 2.0 x FS   |                         |

# MEAS KPSI 700

## SPECIFICATIONS

### STATIC PERFORMANCE

|   |             |             |
|---|-------------|-------------|
| Static Accuracy<br>(combined effects of non-linearity, hysteresis and repeatability, best fit straight line method) | ±1.00% FSO  | BFSL method |
| Resolution  | +0.0001% FS |             |

### ENVIRONMENTAL

|   |  |   |
|---|--|---|
| Wetted Materials  | 316 SS or Titanium; POM; polyurethane or FKM |   |
| Compensated Temp Range  | 0 to 50°C                                    |   |
| Thermal Error<br>(maximum allowable deviation from the Best Fit Straight Line due to a change in temperature) | ±0.05% FSO/°C<br>±0.1% FSO/°C                | worst case over compensated temperature range for ranges < 12 ft (4 m) H <sub>2</sub> O |
| Operating Temp Range  | -20 to 60 °C                                 | when attached to polyurethane cable   |
| Protection Rating   | IP 68, NEMA 6P                               |   |

### ELECTRICAL

|                       |   |   |
|-----------------------|---|---|
| Excitation            | 9-28V – VDC output  | 0-5V, 0-2.5V, 0-4V  |
|                       | 9-28V – mA output   | 4-20  |
|                       | 15-28V – VDC output                                       | 0-10V   |
|                       | 10-28V – VDC output                                       | 1.5-7.5V  |
| Input Current         | 20 mA max   | for mA output   |
|                       | 3.5 mA max  | for VDC output  |
| Output                | 4-20mA, 0-5 VDC, 0-2.5VDC,<br>0-4VDC, 0-10VDC, 1.5-7.5VDC | for ranges < 5 ft (1.5m) H <sub>2</sub> O,<br>only 4-20mA output is available |
| Zero Offset           | ±0.25 mA for mA output<br>< 0.25 VDC for VDC output       |   |
| Output Impedance      | See loop diagram for mA output<br>20 ohm for VDC output   |   |
| Insulation Resistance | 100 mega ohm at 50 VDC                                    |   |
| Circuit Protection    | Polarity, surge/shorted output                            |   |

### CERTIFICATIONS

|  |                |  |
|--|----------------|--|
|  | CE compliant   | EN 61326-1:2001 and 61326-2-3:2006   |
|  | UL, CUL and FM | Class I, II, III, Div 1, Groups A,B,C,D,E,F&G  |
|  | WEEE/RoHS      | Waste from Electrical and Electronic Equipment (WEEE) and Restrictions on the use of Hazardous Substances (RoHS) |

### PHYSICAL

|                            |  |                        |
|----------------------------|--|------------------------|
| Approximate Weight         | 0.44 lbs (198 g) transducer                |                        |
|                            | 0.05 lbs/ft (79 g/m) cable                 |                        |
| Cable Jacket Material      | Polyurethane (standard)<br>ETFE (optional) |                        |
| Cable Pull Strength        | 200 lbs (90 kg)                            |                        |
| Cable Number of Conductors | 4  |                        |
| Cable Conductor Size       | 22 AWG                                     |                        |
| Cable Seal                 | Molded Polyurethane                        | for polyurethane cable |
|                            | FKM Gland                                  | for ETFE cable         |

### TEMPERATURE OUTPUT OPTION (not intrinsically safety approved)


|                                  |             |   |
|----------------------------------|-------------|---|
| Temperature Range                | -20 to 60°C | available for 4-20mA output versions only |
| Output Signal                    | 4-20mA      |   |
| Temperature Measurement Accuracy | ±4°C        |   |

### LIGHTNING PROTECTION (power supply needs to be limited to 150mA to avoid lock up of the gas tube after a suppression event)

|                       |                   |  |
|-----------------------|-------------------|--|
| Life Expectancy       | >1,000 Operations |  |
| Peak Clamping Voltage | 36 Volts          |  |
| Response Time         | <10 nsecs         |  |
| Shunts                | 20,000 Amperes    |  |

# MEAS KPSI 700


## DIMENSIONS

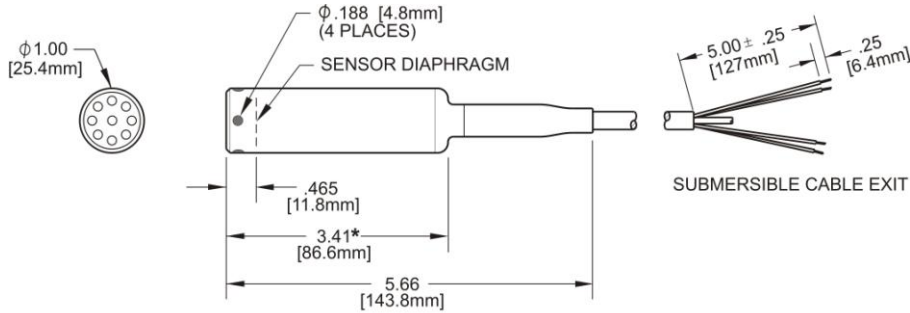

\*ADD 1.95" FOR LIGHTNING PROTECTION OPTION



**Molded Cable Seal Configuration for Polyurethane Cable**

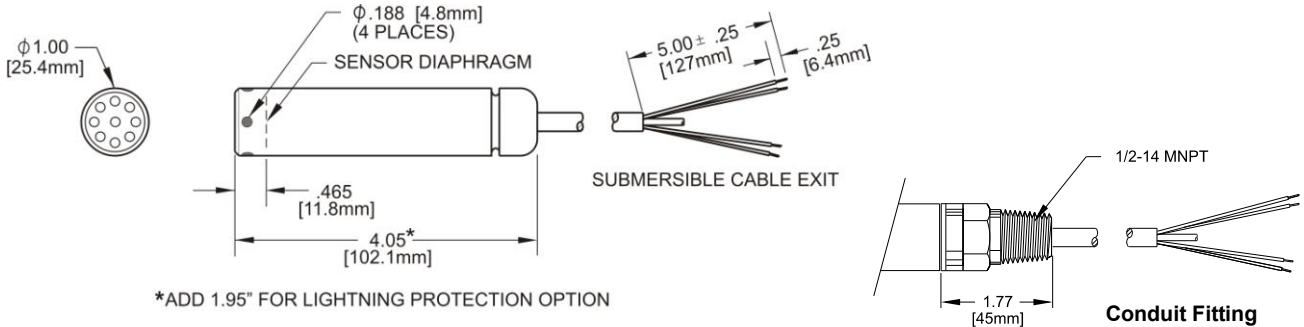


\*ADD 1.95" FOR LIGHTNING PROTECTION OPTION

**Gland Cable Seal Configuration for ETFE cable**

## ELECTRICAL TERMINATION / LOOP RESISTANCE / CERTIFICATIONS

| ELECTRICAL TERMINATION                              |            |              |
|---|------------|--------------|
| 22AWG CONDUCTORS IN A SHIELDED CABLE WITH VENT TUBE |            |              |
| 4-20 mA   | RED        | + EXCITATION |
|   | BLACK      | - EXCITATION |
| 0-5 VDC   | RED        | + EXCITATION |
|   | BLACK      | - EXCITATION |
|   | WHITE      | + SIGNAL     |
| ALL   | DRAIN WIRE | SHIELD       |

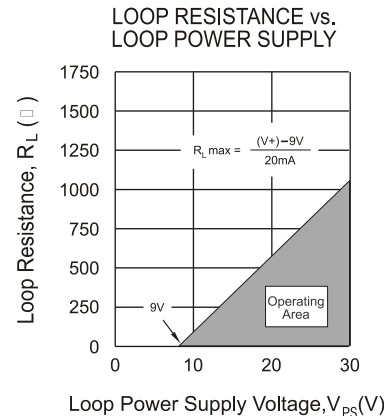

# MEAS KPSI 700

## ORDERING INFORMATION

| MODEL | SUBMERSIBLE LEVEL TRANSDUCER                                |
|-------|---|
| 7 0 0 | ±1.00% FSO Static Accuracy                                  |
| ↓ ↓ ↓ | <b>MATERIAL</b>   |
|       | S Stainless Steel   |
|       | T Titanium  |
| ↓     | <b>REFERENCE FORMAT</b>                                     |
|       | 1 Vented gage   |
|       | 3 Sealed gage   |
|       | 4 Absolute  |
| ↓     | <b>OUTPUT</b>   |
|       | 3 0-5 VDC   |
|       | F 0-2.5 V   |
|       | G 0-4 V   |
|       | H 0-10 V  |
|       | J 1.5-7.5V  |
|       | 4 4-20mA  |
|       | 6 4-20mA temperature measurement option                     |
| ↓     | <b>PRESSURE CONNECTION</b>                                  |
|       | A Open-face nose cap  |
|       | B Ported nose cap   |
|       | E Piezometer nose cap                                       |
|       | 2 1/4" - 18 NPT male fitting                                |
|       | 7 1/2" - 14 NPT male fitting                                |
| ↓     | <b>ELECTRICAL CONNECTION</b>                                |
|       | 0 Molded cable seal   |
|       | 4 1/2" - 14 NPT male conduit fitting with molded cable seal |
|       | A Gland cable seal  |
|       | B 1/2" - 14 NPT male conduit fitting with gland cable seal  |
| ↓     | <b>LIGHTNING PROTECTION</b>                                 |
|       | A None  |
|       | B Full Lightning Protection                                 |
| ↓     | <b>LEVEL RANGE (at MAX output)<sup>1</sup></b>              |
|       | # # # . # # #   |
|       | ↓ ↓ ↓ ↓ ↓ ↓ ↓   |
|       | <b>LEVEL RANGE (at MIN output)<sup>1</sup></b>              |
|       | # # # . # # #   |
|       | ↓ ↓ ↓ ↓ ↓ ↓ ↓   |
|       | <b>MOISTURE PROTECTION</b>                                  |
|       | A None (sealed/absolute only)                               |
|       | B Vent Filter   |
|       | C Aneroid Bellows   |
| ↓     | <b>CABLE TYPE</b>   |
|       | 1 Polyurethane  |
|       | 2 ETFE  |
| ↓     | <b>CABLE LENGTH</b>   |
|       | # # # # (in feet)   |
|       | ↓ ↓ ↓ ↓   |
|       | <b>LABEL<sup>2</sup></b>                                    |
|       | A psi   |
|       | B ft H <sub>2</sub> O                                       |
|       | C m H <sub>2</sub> O  |
| 7 0 0 |   |

**Notes:**

<sup>1</sup> The part number requires two level range limits, corresponding to the maximum and minimum analog outputs of the transducer, to be specified in **pounds per square inch (psi)** to three decimal places. The lower level range is typically 000.000 unless otherwise required. For reverse output requirements, enter the lower level range for the maximum output signal and the upper range for the minimum output. Use the following conversion factors:

ft H<sub>2</sub>O / 2.3073 = psi                      Examples:    10 ft H<sub>2</sub>O / 2.3073 = 4.334 psi                      (enter 004.334 in the part number)  
 m H<sub>2</sub>O / 0.703265 = psi                                           10m H<sub>2</sub>O / 0.703265 = 14.219 psi                      (enter 014.219 in the part number)

For sealed gage reference add local atmosphere when converting to psi. Contact MEAS for assistance.  
 Example:    10 ft H<sub>2</sub>O / 2.3073 +14.7 = 19.034 psi                      (enter 019.034 in the part number)

<sup>2</sup> Units of measure on standard MEAS label. Contact Measurement Specialties if private labeling is required.



Presented by: Absolute Gauge Technologies  
 sales@absoluteauge.com; www.absoluteauge.com,  
 Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1 888 754 7008

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.