




ACC/DSUBM-		HD-I4
DSUB-26 Pin	Terminal	CURRENT
13	1	+IN2
4	2	-IN2
14	3	
5	4	
15	5	+IN3
6	6	-IN3
16	7	
7	8	
23	9	+SUPPLY3
24	10	-SUPPLY3
25	11	+SUPPLY4
26	12	-SUPPLY4
17	13	+IN4
8	14	-IN4
18	15	
9	16	
21	17	+SUPPLY2
22	18	-SUPPLY2
19	19	+SUPPLY1
20	20	-SUPPLY1
11	21	+IN1
2	22	-IN1
12	23	
3	24	
	25	CHASSIS

ACC/DSUBM-		HD-B4
DSUB-26 Pin	Terminal	BRIDGE
13	1	+IN2
4	2	-IN2
14	3	[+SENSE2_1/4B2]
5	4	-SENSE2
15	5	+IN3
6	6	-IN3
16	7	[+SENSE3_1/4B3]
7	8	-SENSE3
23	9	+VB3
24	10	-VB3
25	11	+VB4
26	12	-VB4
17	13	+IN4
8	14	-IN4
18	15	[+SENSE4_1/4B4]
9	16	-SENSE4
21	17	+VB2
22	18	-VB2
19	19	+VB1
20	20	-VB1
11	21	+IN1
2	22	-IN1
12	23	[+SENSE1_1/4B1]
3	24	-SENSE1
	25	CHASSIS

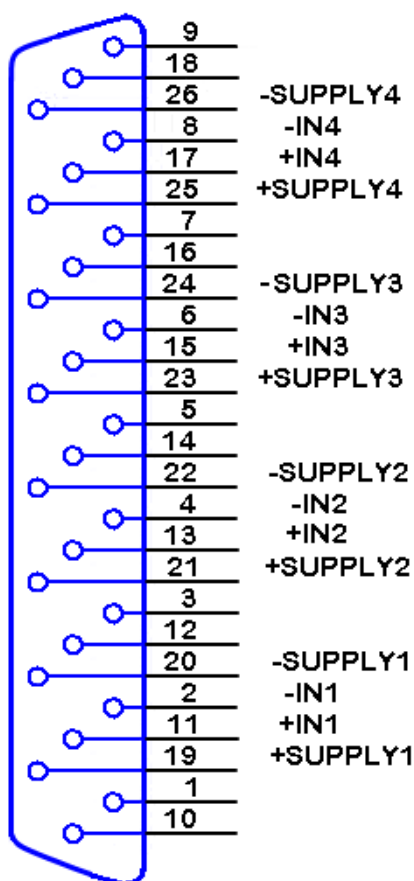

Note

Example

The following picture shows the ACC/DSUBM-HD-B4 connector. To contact with Chassis please use marked screw displayed in the picture.

