

MV-SC3050M

5 MP 1/1.7" Vision Sensor



Introduction

With built-in positioning and measurement algorithms, MV-SC3050M vision sensor can detect object's existence, quantity, location, etc. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.

Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to object's existence, quantity, location, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including Serial Port, TCP, UDP, FTP, Profinet, Modbus, etc.


Available Model

- 8 mm focal length: MV-SC3050M-08M-WBN
- 12.4 mm focal length: MV-SC3050M-12M-WBN
- 16 mm focal length: MV-SC3050M-16M-WBN

Applicable Industry

Consumer electronics, food and medical industry, automobile, etc.

Dimension

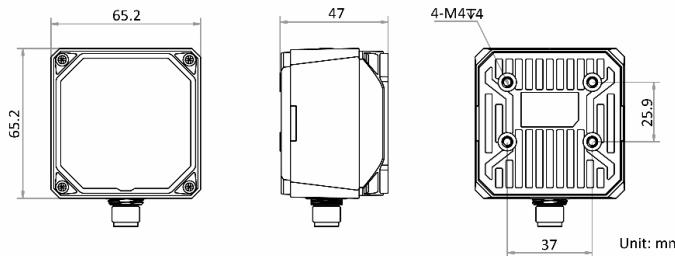

Specification

Model	MV-SC3050M-08M-WBN	MV-SC3050M-12M-WBN	MV-SC3050M-16M-WBN		
Tool					
Vision tool		<ul style="list-style-type: none"> Count: Pattern count, spot count, edge count Defect detection: Exception detection Existence: Pattern existence, spot existence, edge existence, circle existence, line existence Location: Match location, match calibration, fixture Logic tool: If module, condition judge, logic judge, combination judge, character comparison, calculator Measurement: L2L angle, diameter measurement, brightness average value, contrast measurement, width measurement, P2L measurement, greyscale size, line angle, edge width measurement Recognition: OCR, code recognition 			
Solution capacity		Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored.			
Communication protocol		Serial Port, TCP, UDP, FTP, Profinet, Modbus, Ethernet/IP			
Camera					
Sensor type	CMOS, global shutter				
Pixel size	3.2 μm \times 3.2 μm				
Sensor size	1/1.7"				
Resolution	2368 \times 1670				
Max. frame rate	30 fps				
Dynamic range	71.4 dB				
SNR	41 dB				
Gain	0 dB to 18 dB				
Exposure time	16 μs to 1 sec				
Pixel format	Mono 8				
Mono/color	Mono				
Electrical features					
Data interface	Fast Ethernet				
Digital I/O	17-pin M12 connector provides power, Ethernet, digital I/O, and serial port: Input signal \times 2 (Line 0/1), output signal \times 3 (Line 5/6/7), bi-directional I/O \times 3 (Line 2/3/4), and external button input \times 1. Output signal can be set as NPN or PNP.				
Power supply	24 VDC				
Max. power consumption	Approx. 48 W@24 VDC				
Mechanical					
Lens mount	M12-mount, mechanical autofocus lens				
Focal length	8 mm (0.3")	12.4 mm (0.5")	16 mm (0.6")		
Lens cap	Transparent lens cap. Polarization or infrared filter lens cap is optional.				
Light source	White light by default. Red/blue/near-infrared is optional.				
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)				
Dimension	65.2 mm \times 65.2 mm \times 47 mm (2.6" \times 2.6" \times 1.9")				
Weight	Approx. 280 g (0.6 lb.)				
Ingress protection	IP67 (under proper installation of lens and wiring)				
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)				

Humidity	20% to 95% RH, non-condensing
General	
Client software	SCMVS
Certification	CE, FCC, KC

Detection Range

Lens focal length	Installation distance	Field of view	Single pixel accuracy
8 mm (0.3")	25 mm (1.0")	23.68 mm × 17.6 mm (0.9" × 0.7")	0.01 mm
	3000 mm (118.1")	2841.6 mm × 2112 mm (111.9" × 83.1")	1.2 mm
12.4 mm (0.5")	60 mm (2.4")	37.89 mm × 28.16 mm (1.5" × 1.1")	0.016 mm
	3000 mm (118.1")	1894.4 mm × 1408 mm (74.6" × 55.4")	0.8 mm
16 mm (0.6")	90 mm (3.5")	42.62 mm × 31.68 mm (1.7" × 1.2")	0.018 mm
	2000 mm (78.7")	947.2 mm × 704 mm (37.3" × 27.7")	0.4 mm

