

MV-CI013-GS-TF

1.3 MP Industrial Short Wave Infrared Camera



GEN<i>i>CAM

GiGE
VISION


Introduction

MV-CI013-GS-TF camera adopts InGaAs sensor and has built-in multiple ISP functions. It uses GigE interface to transmit non-compressed images in real time, and its max. frame rate can reach 91 fps in full resolution.

Key Feature

- Adopts InGaAs sensor and supports spectral imaging of 0.4 μm to 1.7 μm .
- Supports TEC to provide good cooling effect.
- Multiple ISP functions like digital noise reduction, contrast ratio, etc.
- Adopts compact structure and design to meet spatial requirements.
- Compatible with GigE Vision V2.0 Protocol, GenCam Standard, and third-party software based on the protocol and standard.

Dimension

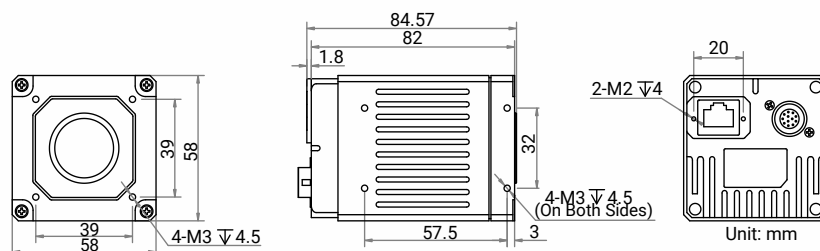


Available Model

MV-CI013-GS-TF

Applicable Industry

Semiconductor, glass cover plate, garbage classification, hyperspectral applications, etc.

Sensor Quantum Efficiency

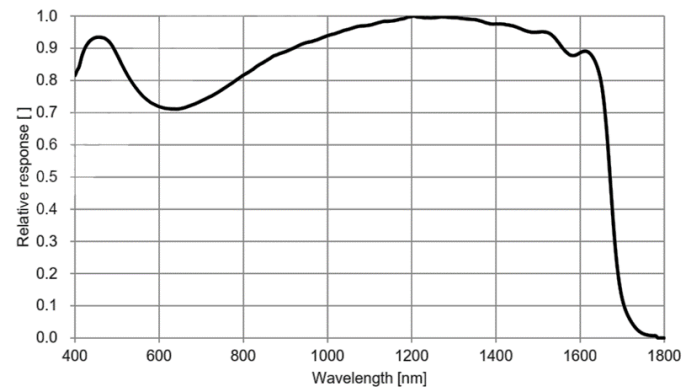

Specification

Model	MV-CI013-GS-TF
Performance	
Sensor type	InGaAs
Sensor model	Sony® IMX990
Pixel size	5 µm × 5 µm
Sensor size	1/2"
Resolution	1280 × 1024
Max. frame rate	91 fps @1280 × 1024 Mono 8
Dynamic range	56 dB
SNR	52.2 dB
Gain	0 dB to 18 dB
Exposure time	UltraShort exposure mode: 3 µs to 7 µs Standard exposure mode: 8 µs to 0.1 sec
Exposure mode	Off/Once/Continuous exposure mode
Pixel format	Mono 8/10/10Packed/12/12Packed
Binning	Supports 1 × 1, 2 × 2, 4 × 4
Decimation	Supports 1 × 1, 2 × 2
Reverse image	Supports horizontal and vertical reverse image output
Electrical feature	
Data interface	Gigabit Ethernet, compatible with Fast Ethernet
Digital I/O	12-pin P10 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2), RS-232 × 1
Power supply	9 VDC to 24 VDC
Power consumption	Typ. 11.7 W@12 VDC (TEC enabled)
Mechanical	
Lens mount	C-mount
Installation method	Installation via three-side screw holes
Dimension	58 mm × 58 mm × 82 mm (2.3" × 2.3" × 3.2")
Weight	Approx. 470 g (1.0 lb.)
Ingress protection	IP40 (under proper lens installation and wiring)
Temperature	Working temperature: -30 °C to 50 °C (-22 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% to 95% RH, non-condensing
General	
Client software	MVS or third-party software meeting with GigE Vision Protocol
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS
Compatibility	GigE Vision V2.0, GenICam
Certification	CE, RoHS, KC



Hangzhou Hikrobot Co., Ltd.
 en.hikrobotics.com