

MV-ID5050M

4.2 MP Smart Code Reader



Introduction

MV-ID5050M smart code reader can read different types of codes with reading speed up to 90 codes/sec. It adopts Hikrobot's deep learning algorithm to process images with good robustness, and can recognize various complex codes.

Key Feature

- Adopts built-in deep learning algorithm to read codes with good robustness.
- Adopts CMOS global shutter sensor to provide high quality images.
- Adopts mechanical autofocus lens to achieve automatic focusing.
- Supports code score and quality evaluation for code printing quality.
- Adopts controllable light source design providing diversified light.
- Ingress protection rating 67.


Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, semiconductor, automobile, new energy, etc.

Available Model

- 8 mm focal length: MV-ID5050M-08S-WBN
- 12 mm focal length: MV-ID5050M-12S-WBN
- 16 mm focal length: MV-ID5050M-16S-WBN
- 25 mm focal length: MV-ID5050M-25S-WBN

Dimension

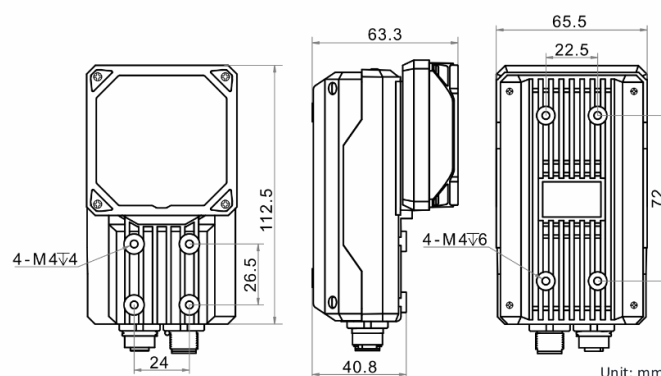

Specification

| Model | MV-ID5050M-08S-WBN | MV-ID5050M-12S-WBN | MV-ID5050M-16S-WBN | MV-ID5050M-25S-WBN |
|-------------------------------|---|--------------------|--------------------|--------------------|
| Performance | | | | |
| Symbologies | 1-dimensional codes: Code 39, Code 93, Code 128, CodaBar, EAN 8, EAN 13, UPCA, UPCE, ITF 14, ITF 25, Matrix 25, MSI, China Post, Code 11, and Industrial 25 | | | |
| | 2-dimensional codes: QR Code, Data Matrix | | | |
| | Stack codes: PDF 417 | | | |
| Max. frame rate | 40 fps | | | |
| Max. reading speed | 90 codes/sec | | | |
| Sensor type | CMOS, global shutter | | | |
| Pixel size | 3.2 μm \times 3.2 μm | | | |
| Sensor size | 1/1.7" | | | |
| Resolution | 2368 \times 1760 | | | |
| Exposure time | 60 μs to 1 sec | | | |
| Gain | 0 dB to 18 dB | | | |
| Mono/color | Mono | | | |
| Communication protocol | SmartSDK, TCP Client, TCP Server, Serial, FTP, Profinet, Ethernet/IP, MELSEC, ModBus, Fins, SLMP | | | |
| Electrical feature | | | | |
| Data interface | Gigabit Ethernet | | | |
| Digital I/O | 12-pin M12 connector provides power and I/O, including opto-isolated input (LineIn 0/1/2) \times 3, opto-isolated output (LineOut 0/1/2) \times 3, RS-232 input \times 1, and RS-232 output \times 1. | | | |
| Power supply | 24 VDC | | | |
| Max. power consumption | Approx. 60 W@24 VDC (light source enabled) | | | |
| Mechanical | | | | |
| Focal length | 8 mm (0.3") | 12 mm (0.5") | 16 mm (0.6") | 25 mm (1.0") |
| Lens mount | M12-mount, mechanical autofocus supported. | | | |
| Lens cap | Half polarization lens cap by default. Transparent and full polarization lens cap are optional. | | | |
| Light source | White light by default. Red/blue/IR light is optional. | | | |
| Indicator | Power indicator (PWR), network indicator (LNK/ACT), and user-defined indicator (U1/U2). | | | |
| Dimension | 112.5 mm \times 65.5 mm \times 63.3 mm (4.4" \times 2.6" \times 2.5") | | | |
| Weight | Approx. 450 g (1.0 lb.) | | | |
| Ingress protection | IP67 (under proper installation of waterproof lens cap) | | | |
| Temperature | Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$) | | | |
| Humidity | 20% to 95% RH, non-condensing | | | |
| General | | | | |
| Client software | IDMVS | | | |
| Certification | CE, FCC, RoHS | | | |