


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	6289	INITIAL RELEASE	DV 09/28/09	<i>DV</i>	<i>DV</i>

MODEL	SENSITIVITY
3333A1	10mV/G
3333A2	100mV/G
3333A3	50mV/G

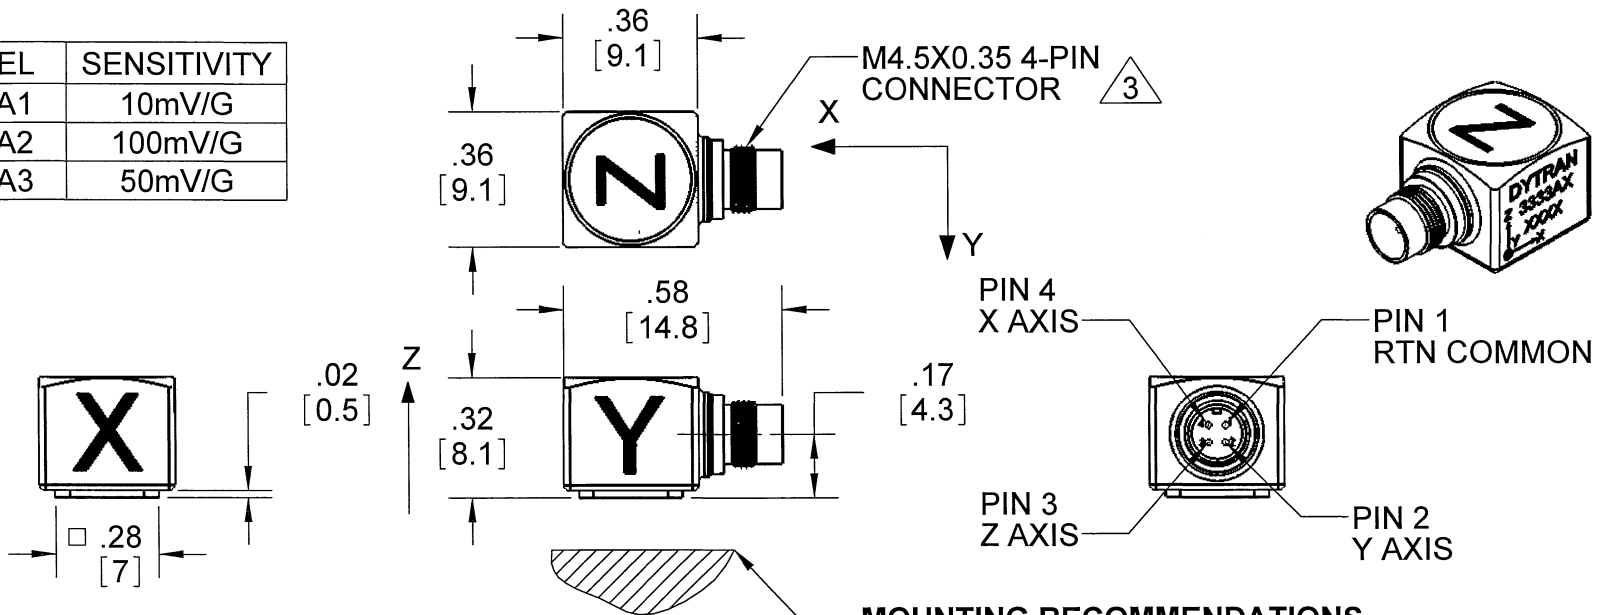

4. HOUSING/CONNECTOR MATERIAL: TITANIUM
- 3 MATES WITH 6893AXX CABLE
2. ARROWS INDICATE DIRECTIONS OF ACCELERATION FOR POSITIVE OUTPUT
1. WEIGHT: 2.8 GRAMS

MOUNTING RECOMMENDATIONS
 PREPARE A SURFACE AT LEAST .300 BY .300. SURFACE FLATNESS MUST BE EQUAL OR BETTER THAN .0001 TIR. USE ONE DROP OF CYANOACRYLATE TO MOUNT THE ACCELEROMETER.

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 .X ± 0.8 ± 1° .XXX ± 0.10 .XX ± 0.25	
3333A	NEXT ASSY	MATERIAL	FINISH
APPLICATION		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION USA		ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	

CONTRACT NO.



MASTER ONLY IF IN RED
 Chatsworth, CA

TITLE:

OUTLINE/INSTALLATION DRAWING, 3333A SERIES

APPROVALS		DATE
ORIG	DV	09/28/09
CHK	<i>DV</i>	10/26/09
APP	<i>DV</i>	10/26/09
APP		

SIZE A	CAGE CODE 2W033	DWG. NO. 127-3333A	REV A
SCALE: 2:1		SOLIDWORKS	SHEET 1 OF 1

172-0081, REV C



Presented by: Absolute Gauge Technologies
 sales@absolute-gauge.com; www.absolute-gauge.com,
 Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1 888 754 7008

MODEL NUMBER 3333A1	PERFORMANCE SPECIFICATION	DOC NO PS3333A1
	Accelerometer, Triaxial, IEPE	REV D, ECN 8800, 07/11/12



Actual Size

- **ULTRA LOW FREQUENCY RESPONSE**
- **ULTRA LOW NOISE LEVEL**
- **WEIGHT ONLY 2.3 GRAMS**

	ENGLISH		SI	
Weight	0.08	oz	2.3	grams
Mounting	Adhesive		Adhesive	
Connector [1]	4-pin		4-pin	
Housing	Ti-6 AL-4V		Ti-6 AL-4V	
	Ti-6 AL-4V		Ti-6 AL-4V	
Sensing Element	Case ground		Case ground	
	Ceramic		Ceramic	
Mode	Shear		Shear	

PHYSICAL

Weight
Mounting
Connector [1]
Housing
Sensing Element
Mode

PERFORMANCE

Sensitivity, +15-10% [2]
Acceleration Range,
Frequency Range, +15/-10%
Resonance Frequency
Linearity [3]
Transverse Sensitivity Max
Noise floor
Spectral Noise

	ENGLISH		SI	
Sensitivity, +15-10% [2]	10	mV/g	1.02	mV/m/s ²
Acceleration Range,	+/-500	Gpeak	+/- 4905	m/s ² peak
Frequency Range, +15/-10%	.31-10,000	Hz	.31-10,000	Hz
Resonance Frequency	>24	kHz	>24	kHz
Linearity [3]	1	%F.S.	1	%F.S.
Transverse Sensitivity Max	6	%	6	%
Noise floor	0.004	Grms	0.039	m/s ² rms
Spectral Noise	419	μGrms/sqr(Hz)	4110	μm/s ² rms/sqr(Hz)
	73	μGrms/sqr(Hz)	716	μm/s ² rms/sqr(Hz)
	45	μGrms/sqr(Hz)	441	μm/s ² rms/sqr(Hz)
	21	μGrms/sqr(Hz)	206	μm/s ² rms/sqr(Hz)
10000Hz	11	μGrms/sqr(Hz)	108	μm/s ² rms/sqr(Hz)

ELECTRICAL

Supply Current Range [4]
Compliance Voltage Range
Output Impedance, Typ.
Output Bias Voltage
Discharge Time Constant

	ENGLISH		SI	
Supply Current Range [4]	2 to 20	mA	2 to 20	mA
Compliance Voltage Range	+18 to +30	VDC	+18 to +30	VDC
Output Impedance, Typ.	100	Ω	100	Ω
Output Bias Voltage	11 to 13	VDC	11 to 13	VDC
Discharge Time Constant	0.5 - 1.5	sec	0.5 - 1.5	sec

ENVIRONMENTAL

Shock Max
Vibration Max
Operating Temperature
Seal
Magnetic Sensitivity at 100 Gauss
Base Strain Sensitivity

	ENGLISH		SI	
Shock Max	5000	g pk	49050	m/s ²
Vibration Max	3000	g pk	29430	m/s ²
Operating Temperature	-60 to +250	°F	-51 to +121	°C
Seal	Hermetic		Hermetic	
Magnetic Sensitivity at 100 Gauss	0.00007	g/Gauss	0.00069	m/s ² /Gauss
Base Strain Sensitivity	0.02	g/με	0.20	m/s ² /με

This family also includes:

Model	Sensitivity (mV/g)	Range (Gpeak)	Resolution (Grms)	Oper. Temp(°F)	TC
3333A2	100	50	0.00095	-60 to +165	0.5 - 1.5
3333A3	50	100	0.0009	-60 to +200	0.5 - 1.5





Refer to the performance specifications of the products in this family for detailed description

Supplied Accessories:

1) Accredited calibration certificate (ISO 17025)

Notes:

- [1] Coaxial, M4.5 X 0.35 Connector. Mates with Dytran cable Model 6893AXX
- [2] Measured at 100Hz, 5 Grms per ISA RP 37.2.
- [3] Measure using zero-based straight line method, % of F.S. or any lesser range.
- [4] Do not apply power to this system without current limiting, 20 mA MAX. To do so will destroy the IC charge amplifier.
- [5] In the interest of constant product improvement, we reserve the right to change specifications without notice.

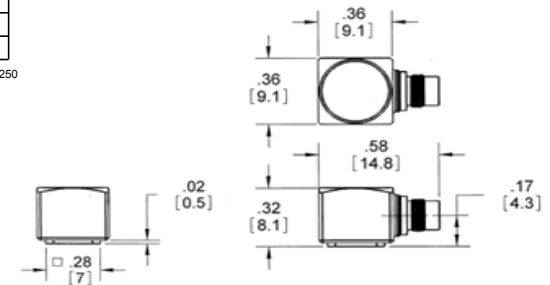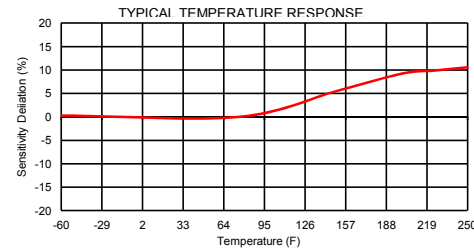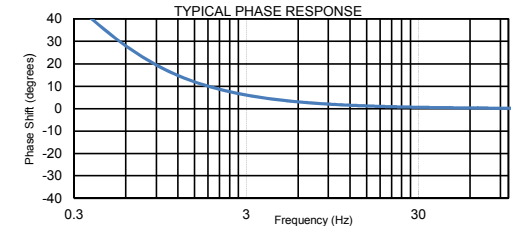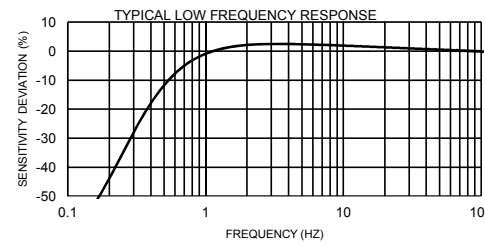

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3333A for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax: 818.700.7880 www.dytran.com
For permission to reprint this content, please contact info@dytran.com



Presented by: Absolute Gauge Technologies
sales@absolute-gauge.com; www.absolute-gauge.com,
Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1 888 754 7008