

MV-SC6016M

1.6 MP Smart Camera



Introduction

MV-SC6016M smart camera is developed based on high-performance embedded platform with strong calculation performance. It integrates VM functions and AI deep learning algorithm, and can use more than 140 algorithms. It adopts multiple interfaces for supporting external light source, display, mouse, etc.


Available Model

- 6 mm focal length smart camera:
MV-SC6016M-06M-XBN
- 12 mm focal length smart camera:
MV-SC6016M-12M-XBN
- 16 mm focal length smart camera:
MV-SC6016M-16M-XBN

Applicable Industry

Consumer electronics, food and pharmaceutical, packaging, positioning and grabbing, etc.

Dimension

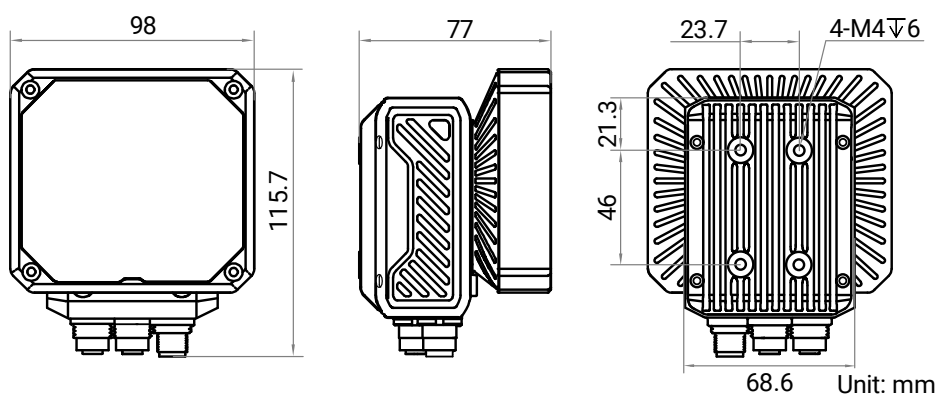

Key Feature

- Adopts AI deep learning algorithm to achieve OCR, object recognition, defect detection, etc.
- Integrates VM functions and supports more than 140 algorithms.
- Supports four-color light source (red/green/blue/white), and switching as needed.
- Adopts multiple I/O interfaces, such as multiple input/output signals.
- Supports multiple communication protocols.
- Supports indicators displaying device status for easy debugging and maintenance.
- Supports ingress protection IP67.

Specification

Model	MV-SC6016M-06M-XBN	MV-SC6016M-12M-XBN	MV-SC6016M-16M-XBN
Tool			
Function module	VM Platform		
Communication protocol	TCP, UDP, ModBus, Serial Port, Profinet, EtherNet/IP, Fins, MC, FTP, etc.		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm \times 3.45 μm		
Sensor size	1/2.53"		
Resolution	1408 \times 1204		
Max. frame rate	120 fps		
Gain	0 dB to 15 dB		
Exposure time	25 μs to 30000 μs		
Pixel format	Mono 8		
Mono/color	Mono		
Platform			
Memory	8 GB		
Storage	64 GB		
Electrical feature			
Data interface	Gigabit Ethernet (1000 Mbit/s)		
Digital I/O	17-pin M12 male connector provides power and I/O, providing opto-isolated input \times 2 (Line 0/1), opto-isolated output \times 2 (Line 4/5), configurable non-isolated input/output \times 2 (Line 2/3), RS-232 \times 1, light source output (max. 30 W) \times 1		
Extended interface	17-pin M12 female connector provides VGA \times 1 and USB host \times 1		
Power supply	24 VDC		
Power consumption	Approx. 12 W @ 24 VDC (without external light source) Approx. 42 W @ 24 VDC (with external light source) Approx. 16.6 W @ 24 VDC (light source is enabled)		
Mechanical			
Lens mount	M12-mount, mechanical focus		
Focal length	6 mm	12 mm	16 mm
Light source	Red light, green light, blue light, white light (switching by software)		
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), and user-defined indicator (U1/U2)		
Dimension	77 mm \times 98 mm \times 115.7 mm (3.0" \times 3.9" \times 4.6")		
Weight	Approx. 750 g (1.7 lb.)		
Ingress protection	IP67 (under proper installation of waterproof lens cap)		
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)		
Humidity	20% RH to 95% RH (no condensation)		
General			
Certification	CE, KC		

Detection Range

Focal Length	Installation Distance	Field of View	Single Pixel Accuracy
6 mm	100 mm	81 mm × 60 mm	0.058 mm
	2000 mm	1620 mm × 1178 mm	1.15 mm
12 mm	100 mm	40 mm × 30 mm	0.029 mm
	2000 mm	810 mm × 590 mm	0.575 mm
16 mm	100 mm	30 mm × 22 mm	0.022 mm
	2000 mm	607 mm × 442 mm	0.431 mm

